


39 Series – Heavy Duty Lock Cases

Not to scale

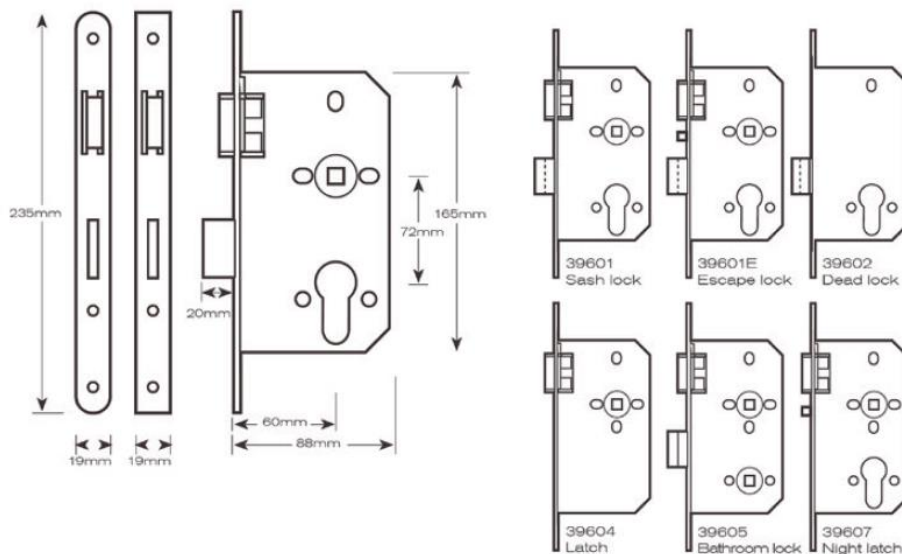

39601	Europrofile sashlock case	39604	Latch
39601E	Europrofile escape sashlock case	39605	Bathroom lock
39602	Europrofile deadlock case	39607	Mortice night latch

Overview

- Self adjusting follower is engineered to tightly grip the lever handle spindle
- Heavy duty springing with short travel follower suitable for use with unsprung door furniture
- Double throw 20mm deadbolt
- 72mm to comply with BS8300
- Boxed striking plate
- Suitable for through fixed lever handles and escutcheons
- Reversible latch bolt
- Matching satin stainless steel forend and strike as standard.

Maintenance

- Every 3 months, check the forend, strike plate and cylinder retaining screws are tight. To be carried out by approved specialists only.

Fixings	38mm centre bolt
Handing	Reversible (Left/Right)
Backset	60mm
Follower	8mm
Lockcase depth	90mm
Height	165mm
Lockcase thickness	16mm
Forend	Radius or Square
Forend size	235mm (L) x 19mm (W)
Faceplate & strike	Grade 304 Satin Stainless Steel

CE Marked, Suitable for use on Fire Doors

- Tested to EN 1634-1 2014 on 30 and 60 minute timber fire doors and 240 minute metal fire doors
- For 30 and 60 min fire doors use 1mm interdens behind the strike plate and 2mm interdens around the lockcase

Warranty

Supported by a 2 year warranty

Standards

CE Marked and fully tested to EN 12209 2003

Grade 3 Category of use

High frequency of use by public, with little incentive to exercise care

Certified Approved	CF5543
BS EN 12209 Classification	3X810G-B020
BS EN 12209 CE Cert No	0086-CPR-658466