




Electric strike

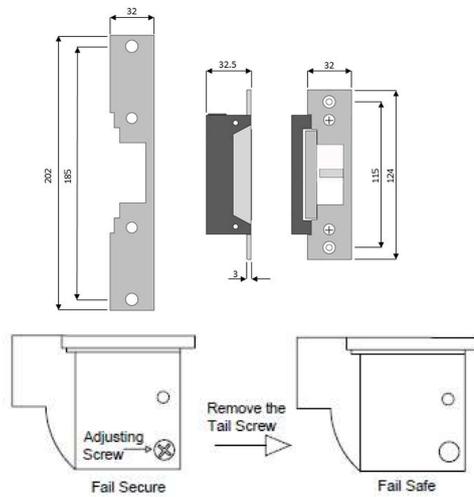

70203M Electric strike 12v or 24v

- CE Marked
- Dual voltage 12/24V AC/DC (selectable on site)
- AC fail secure only
- DC Fail safe or Fail Secure selectable
- Holding force up to 1000 lbs (434kgs) per door leaf (dependant on installation)
- Dual monitored
- Fire rated for use on 60min timber doors

Technical Data

Maintenance

To be carried out by approved specialist only.
 No abrasives or chemical materials to be used, wipe with soft damp cloth, or when necessary warm soapy water and a soft cloth. Every three months check that the lever handle grub screw is flush with the surface on the handle. If it is projecting re tighten it. If the rose is loose remove the rose cover and tighten the through fixing bolts
 If for any reason the products fail due to a defect in manufacture contact us and we will advise you of the replacement procedure