




Elevation

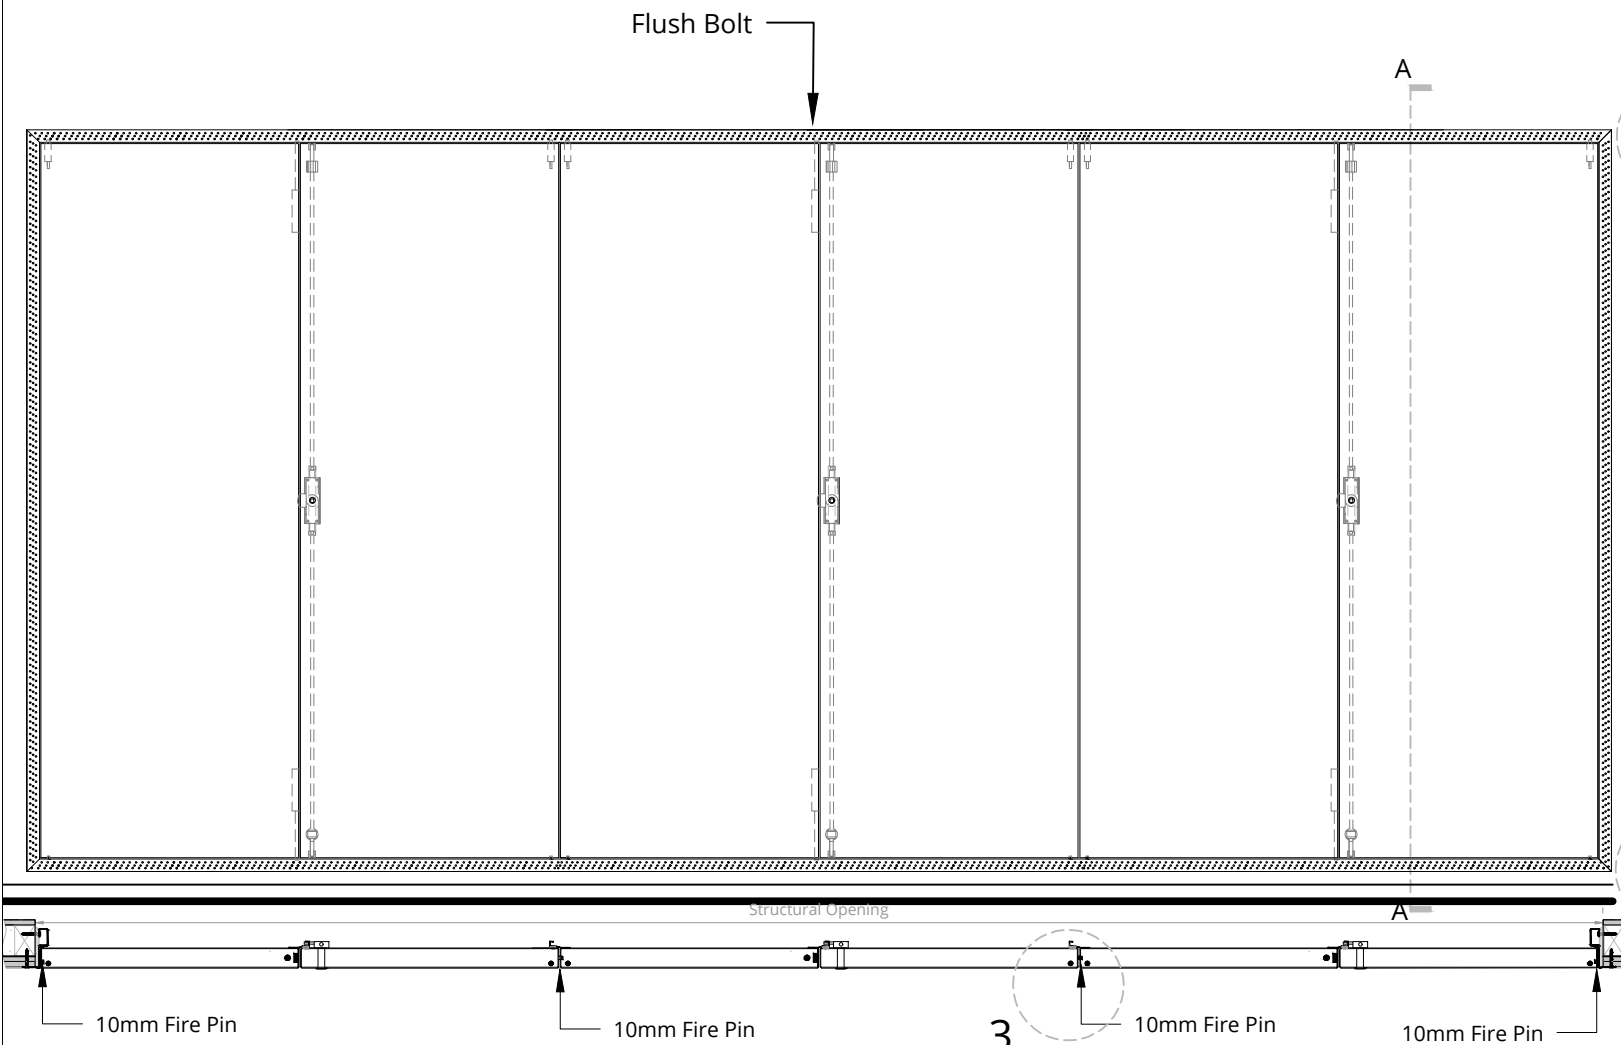


Section A-A

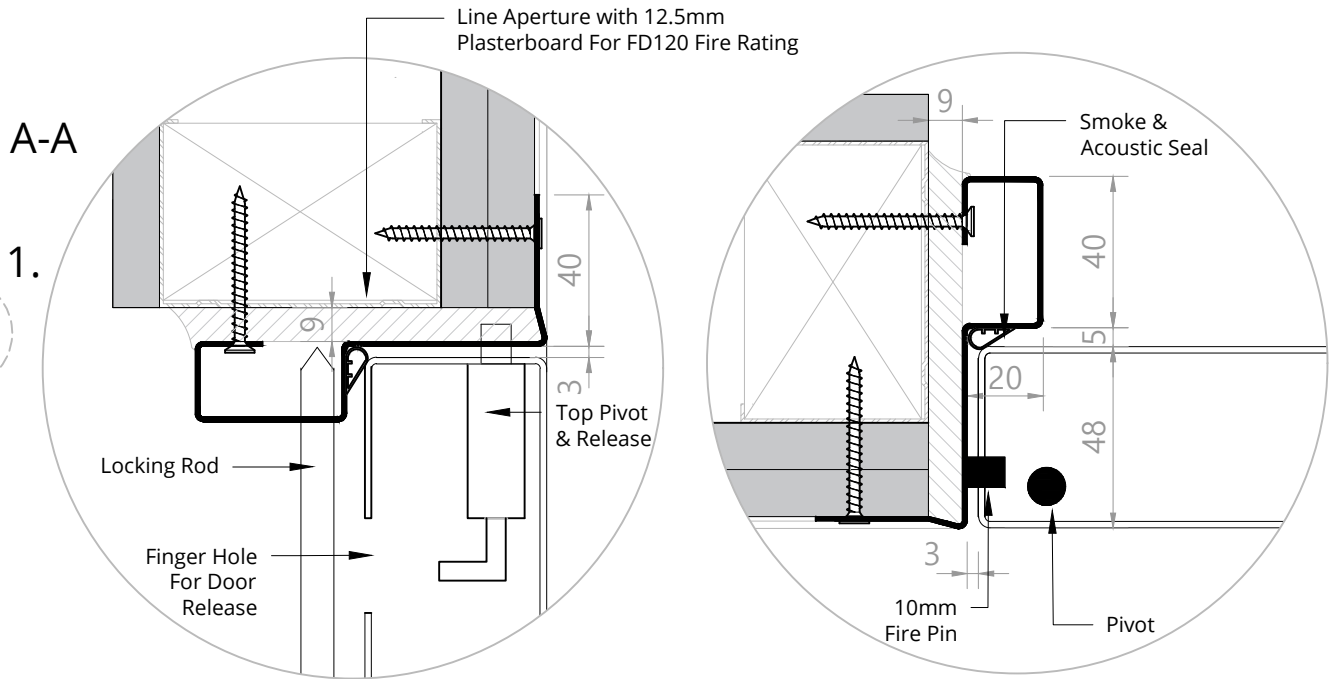



Frame/ Pivot

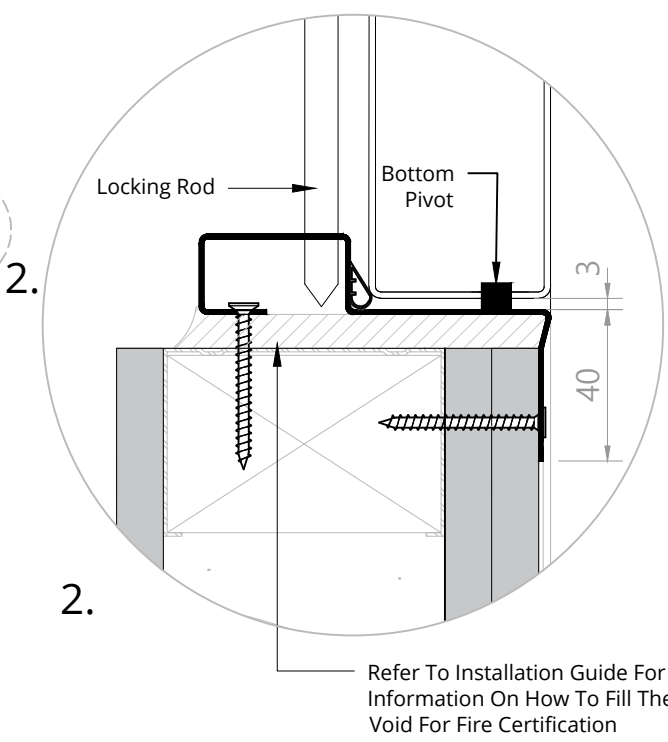

Refer To Installation Guide For Information On How To Fill The Void For Fire Certification

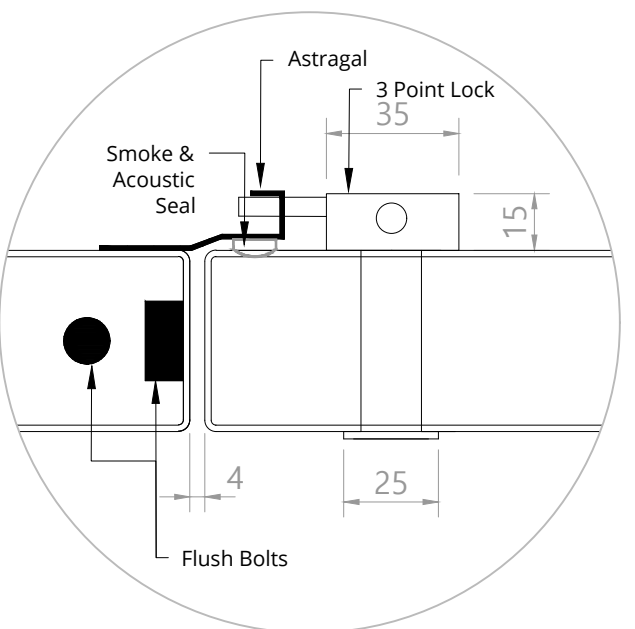

Lock

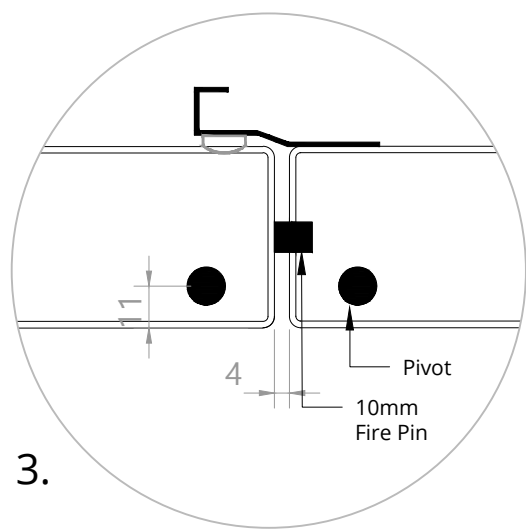

PLEASE NOTE: For FD90/FD120 Fire Rating The Aperture Must Be Lined With A Minimum Of 12.5mm Plasterboard



W: www.aspex-uk.co.uk
E: sales@aspex-uk.co.uk
England & Wales T: 0116 278 3506
Scotland & Ireland T: 0123 672 0061

drawing title	
Sextuple FD120 Steel Door Standard Lock	
dwg number	rev
NRS-46000-12-STE	

product	
novista riser doorsets	
drawn by	date
IS	01/07/20
scale	
1:18 & 1:2 @ A3	

rev	comment	date

- notes
- 1. Do not scale drawings
 - 2. Site verify all dimensions prior to construction
 - 3. Report all discrepancies to Aspex immediately
 - 4. Read in conjunction with all relevant documents and drawings