


Novista Riser Steel

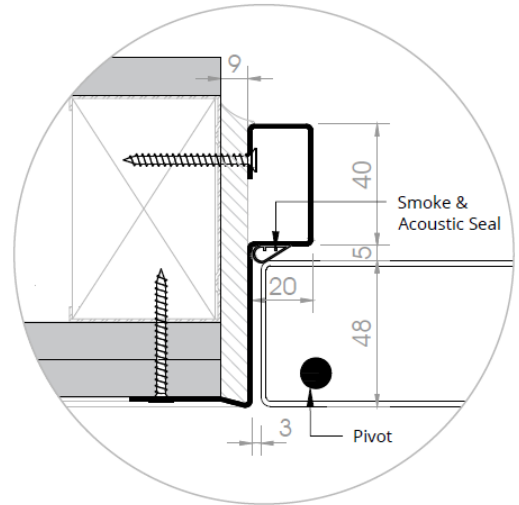

Frame	Concealed/Picture frame design made from 1.2mm steel. 3 or 4 sided frame options
Leaf	Double skin 1.0mm Zintec Steel with glass wool insulated core. 48mm thick
Finish	Primed or Polyester Powder Coat to RAL colour options
Configurations	Single leaf, double leaf and up to six leaves within one frame
Leaf Height/width	Up to 2850mm high and 1150mm wide leaves (please consult our technical department)
Hinge	Concealed quick release pivot hinge operation
Locking	3 point security lock as standard with square key operation. Cylinder option available
Concealed lock option	Hides the chosen lock mechanism behind a flush hinged pocket
Bi-Directional fire testing	In line with current construction trends, Novista Risers are tested from both directions of attack from fire

Performance

- Fire Rating** – FD120 (as standard)
- Acoustic Rating** – 41dB Rw (as standard)
- Smoke/Air tested** – To BS6375-1, BSEN1634-3 and to BSEN13501-2
- Thermal Resistance** – 1.43(m2K)/W



OPTIONAL

Novista Riser Steel – Flip-lock (Concealed lock)



Concealed lock option

Flip lock hides chosen lock mechanism behind a flush hinged pocket. FD60 fire rated and bi-directionally tested.

Novista Riser Performance

Fire Rating – FD120 (as standard)

Acoustic Rating – 41dB Rw (as standard)

Smoke/Air tested – To BS6375-1, BSEN1634-3 and to BSEN13501-2

Thermal Resistance – 1.43(m2K)/W

